

G8-1P (MCB)


LEITUNGSSCHUTZSCHALTER 1P

NADPROUDOVÝ JISTIČ 1P


ВЫКЛЮЧАТЕЛЬ МАКСИМАЛЬНОГО ТОКА 1Ф

INTERRUTTORE DI SOVRACORRENTE MONOFASE

NEW

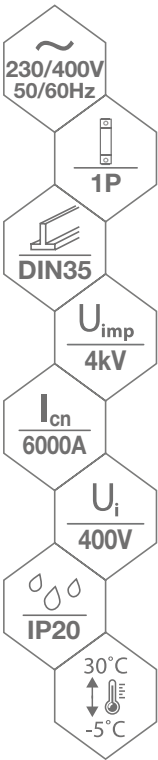

Certificate No. 40057107

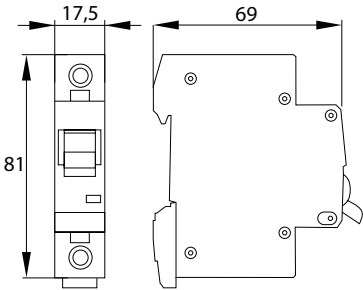

terminal capacity:
max. 25mm²



possibility of sealing



trip indicator light



possibility to connect
with comb rails



DIN35 rail mounting



descriptive box

Schelinger

code

A02-G8-1P-B02
A02-G8-1P-B04
A02-G8-1P-B06
A02-G8-1P-B10
A02-G8-1P-B16
A02-G8-1P-B20
A02-G8-1P-B25
A02-G8-1P-B32
A02-G8-1P-B40
A02-G8-1P-B50
A02-G8-1P-B63
A02-G8-1P-C02
A02-G8-1P-C04
A02-G8-1P-C06
A02-G8-1P-C10
A02-G8-1P-C16
A02-G8-1P-C20
A02-G8-1P-C25
A02-G8-1P-C32
A02-G8-1P-C40
A02-G8-1P-C50
A02-G8-1P-C63



EAN

5900280970657
5900280970664
5900280970671
5900280968869
5900280968852
5900280970688
5900280970695
5900280970701
5900280970718
5900280970725
5900280970732
5900280970749
5900280970756
5900280970763
5900280970770
5900280970787
5900280970794
5900280970800
5900280970817
5900280970824
5900280970831
5900280970848



package

1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120
1/12/120



characteristics

B
B
B
B
B
B
B
B
B
B
B
C
C
C
C
C
C
C
C
C
C
C
C

In

rated current [A]

2
4
6
10
16
20
25
32
40
50
63
2
4
6
10
16
20
25
32
40
50
63